


无刷直流风机 (Dc Brushless Fan)

J84FZW45-38G、J84FZW49-38G

□92×38mm



产品功能 (FUNCTION)

- ✓ 防反接
Polarity Protection
 - ✓ 软启动
Soft Start
 - ✓ 逆风起动
Push against the wind
 - ✓ PWM 信号调速
PWM signal speed regulation
- ✓ 转速信号输出
Speed signal output
 - ✓ 堵转保护与自动重启
Locked-rotor protection and automatic restart
 - ✓ 超转保护
Overspeed protection

产品参数 (PARAMETER)

额定电压 Rated Voltage (VDC)	功率 Power (W)	基准转速 Rated Speed (r/min)	最大静压 Static Pressure (Pa)	最大风量 Air Flow (m³/h)	噪声 Acoustic Noise (dB(A))	重量 Weight (g)	工作温度 Operating Temperature (℃)
24	≤7.2	≥5800	≥205	≥130	≤51	≤350	-55~+100
	≤30	≥11000	≥540	≥240	≤69		

环境适应性&电磁兼容 (Environmental adaptability & EMC)


环境适应性：满足 GJB7246-2011，以及 GJB150.8A-2009 淋雨、GJB150.12A-2009 砂尘、GJB150.24A-2009 温度-高度-湿度、GB/T4208-2017 中 IP55 防护等级。

Environmental adaptability Meet GJB7246-2011, as well as GJB150.8A-2009 rain, GJB150.12A-2009 sand, GJB150.24A-2009 temperature-height-humidity, and IP55 protection level in GB/T4208-2017.

电磁兼容：满足 GJB151B-2013 中 CE102、CE107、RE102 测试项。

EMC Meet the test items of CE102, CE107 and RE102 in GJB151B-2013.

外形安装尺寸 (DIMENSION)

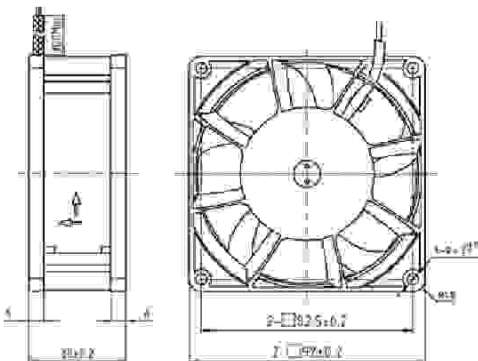

引出线定义 (Lead wire)

导线功能 (Wire Function)	电源正 (VCC)	GND	调速 (Speed regulation)	转速信号 (Speed signal)
导线颜色 (Wire Color)	红 (RED)	黑 (BLACK)	蓝 (BLUE)	棕 (BROWN)

PQ 曲线 (PQ curve)

