
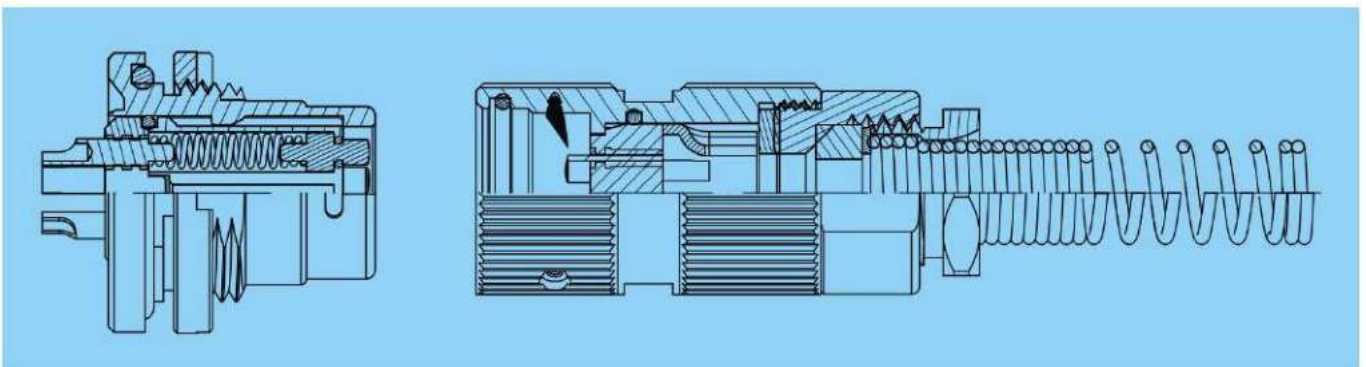


UL29 SERIES
Technical specification:



Working temperature	-55 ° C ~ +125 ° C
Relative humidity	90%~95% (40±2°C)
Working pressure	4.39KPa~101.33KPa
Salt spray	72 hours in 5% NaCl mist
Vibration	10Hz~200GHz,
Impact	980 m / s ² , instantaneous break < 1μs
Mechanical life	3000 times
Insulation resistance	≥5000MΩ (normal)
Working current	8A
Contact resistance	< 10MΩ
Withstand voltage (sea level)	1150V (AC)

Construction:


UL29 Series Part Numbering System

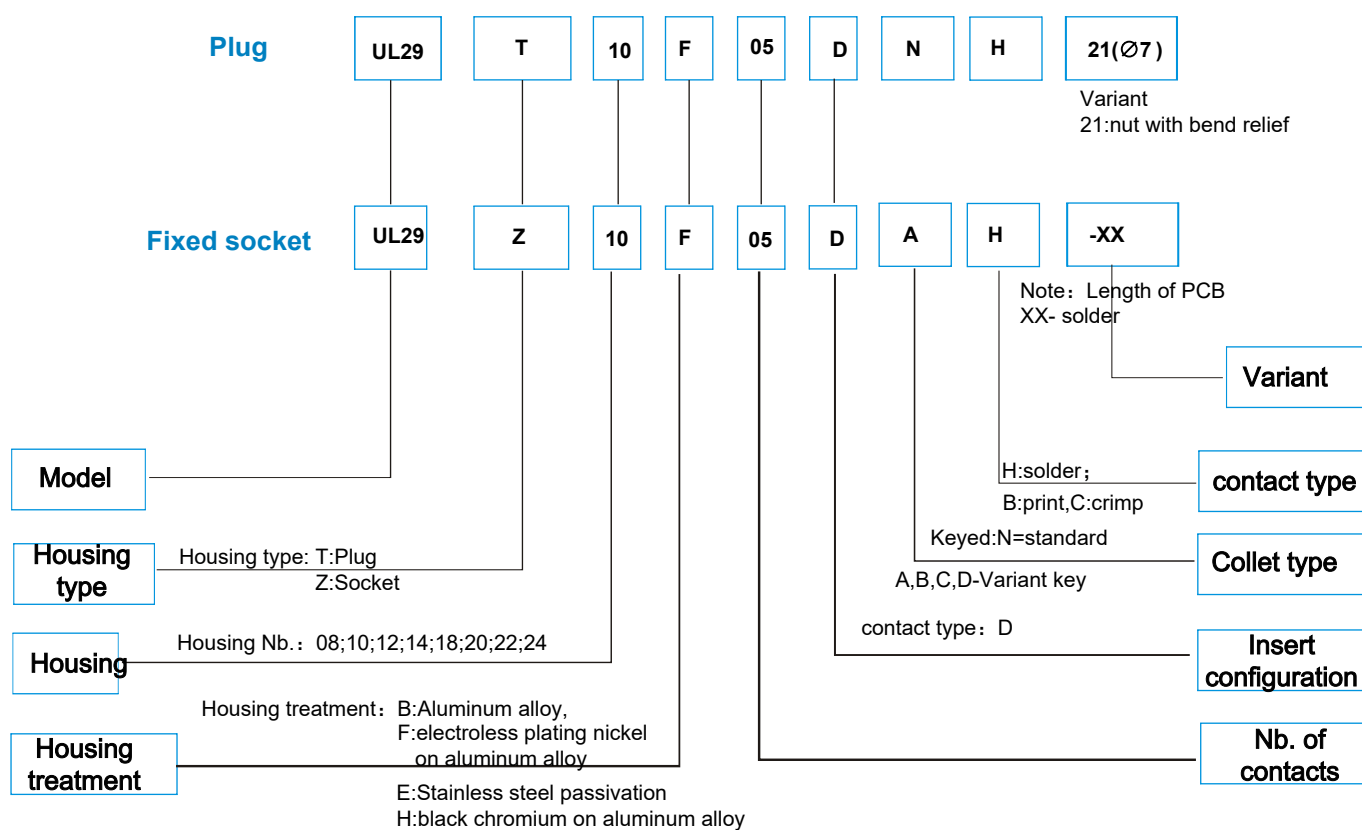

UL29 Plug

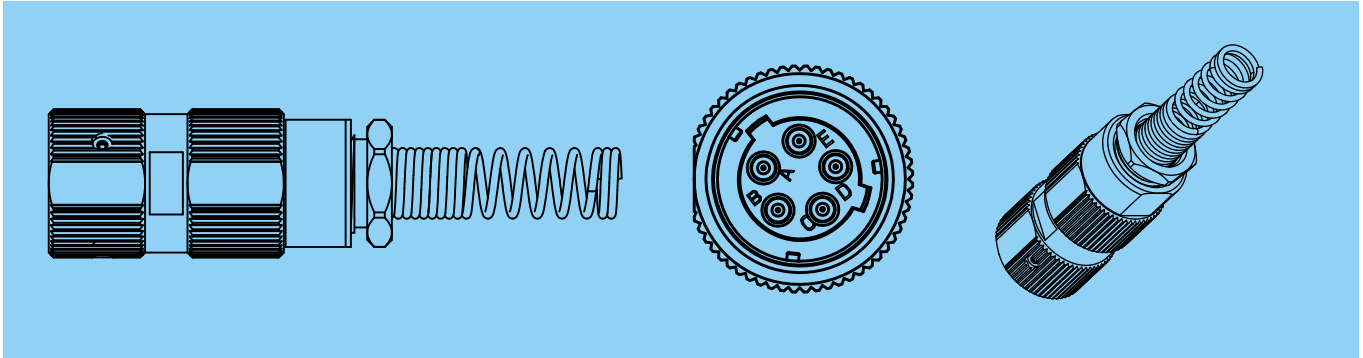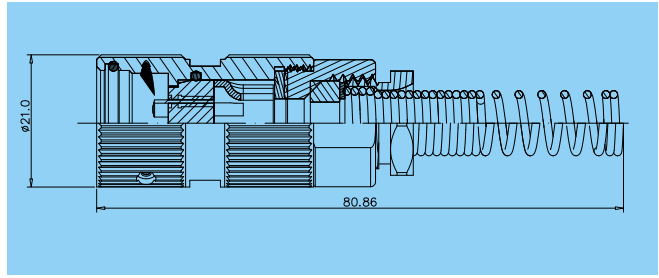

UL29 Socket

