
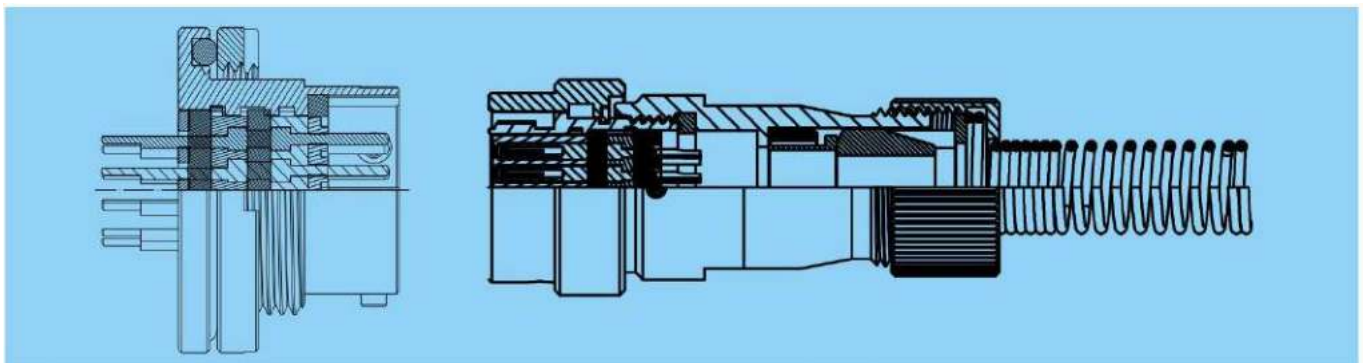


YL SERIES
Technical specification:



Working temperature	-55 ° C ~ +125 ° C
Relative humidity	90%~95% (40±2°C)
Working pressure	4.39KPa~101.33KPa
Salt spray	96 hours in 5% NaCl mist
Sealing	socket: pressure difference 1.01×10 ⁵ Pa, no bubble leakage for 1min; Head socket: 1m water depth, 2h no water seepage
Vibration	10Hz~2000Hz,
Impact	980m / s ² , instantaneous break ≤ 1μs
Mechanical life	500 times
Insulation resistance	≥5000MΩ (normal)
Contact resistance	12.5MΩ
Withstand voltage (sea level)	1000V (AC)
Working current	3A

Construction:


YL Series Part Numbering System

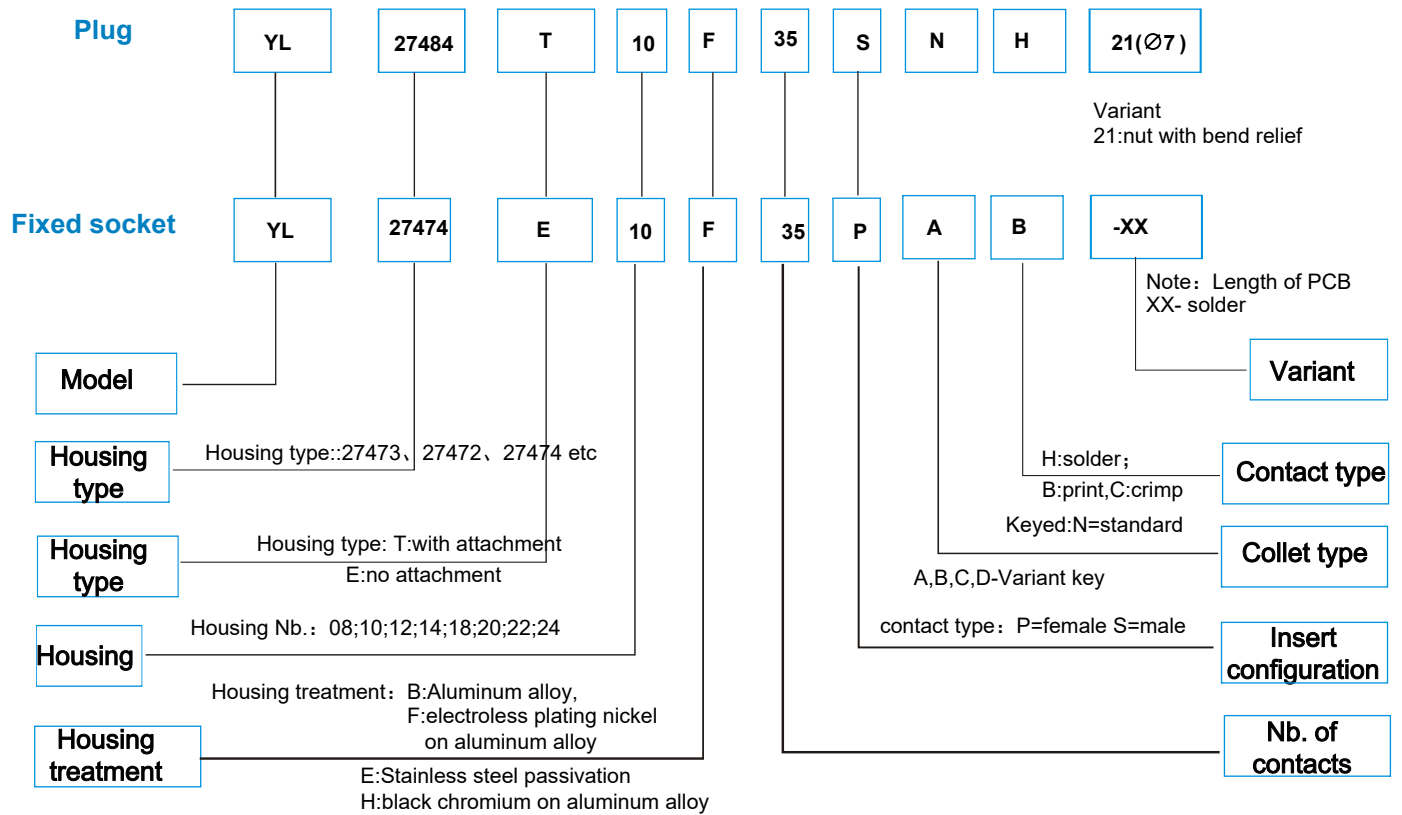

YL Plug

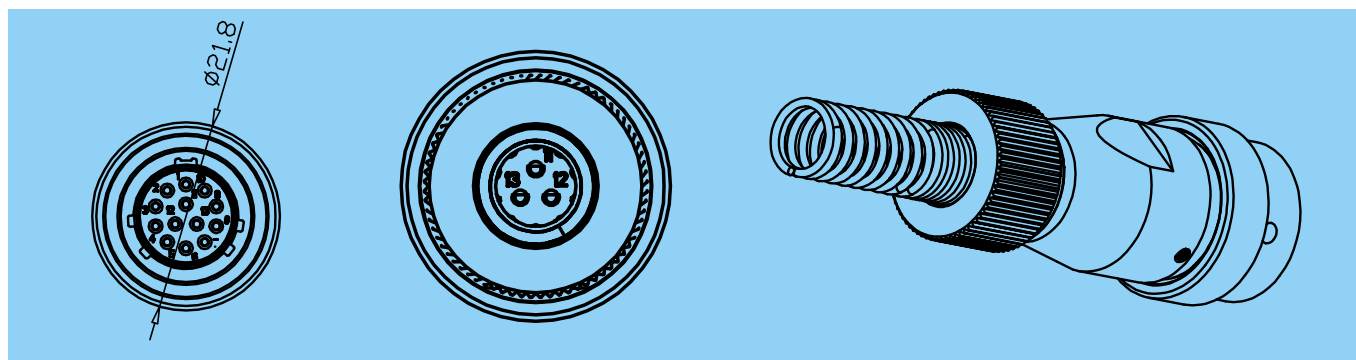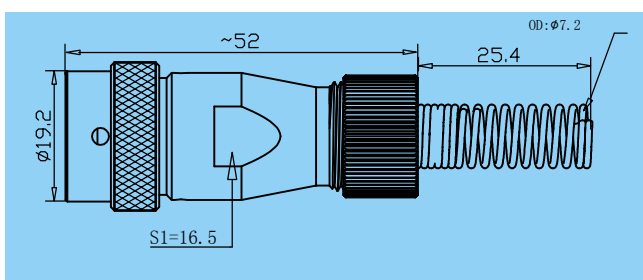

YL Socket

