

AC-DC Power Converters^①


Special features:

- Output power up to 792W
- >0.99 Power factor
- Efficiency up to >93% at full load
- Can be paralleled
- Internal inrush current limit
- Input over current, over/under voltage protection, output under voltage, over current, short protection
- Optional protection mode: auto-recovery or hiccup
- Meet military standard GJB181-86 and GJB298-87 for transient/spike content
- Single output: 5V, 12V, 28V
- Optional input voltage
- Choose M or S grade for wide operating temperature range: -55~100°C

Output Voltage Package	5V	12V	28V
Half Brick	60A/300W	30A/360W	13A/364W
Full Brick	100A/500W	66A/792W	28A/784W

Notes : ① Some models are in development and not released , detailed information please contact us

AC-DC Ordering information

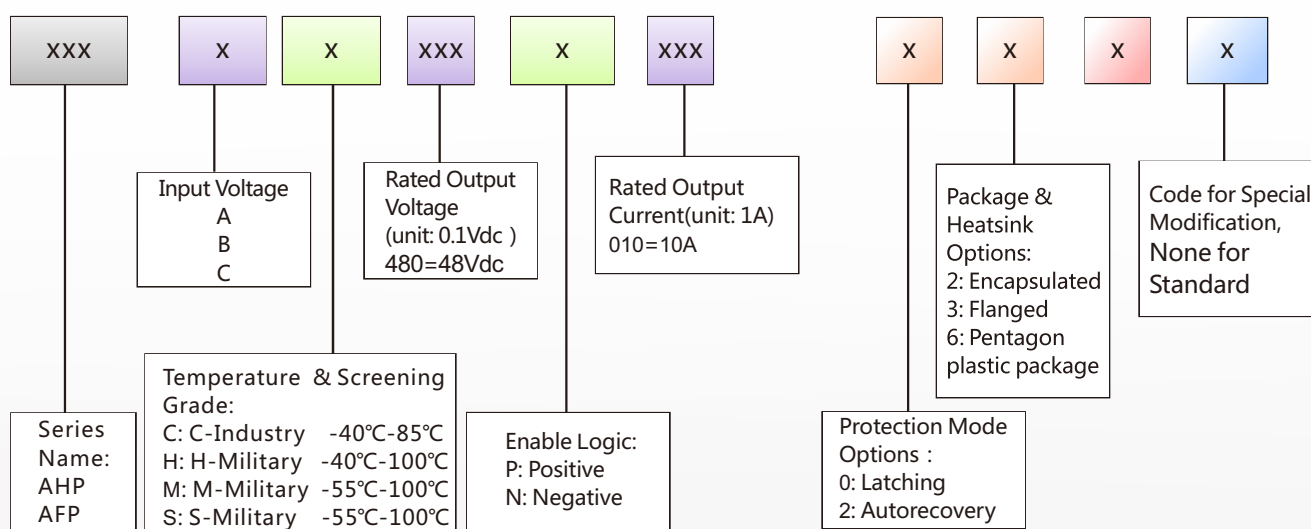

Notes: Screening items please refer page 10