

IP 65




WAC3 Series

WAC3MPA-1

WAC3MPB-1





WAC3FCA

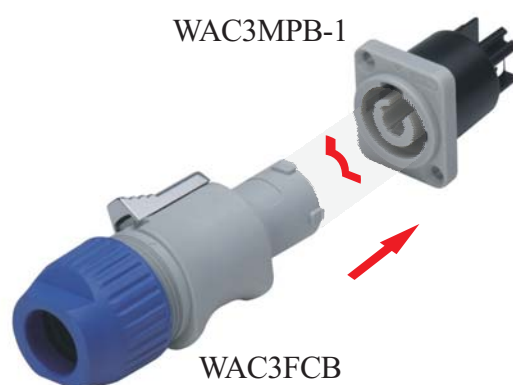

WAC3FCB

Receptacle

Plug

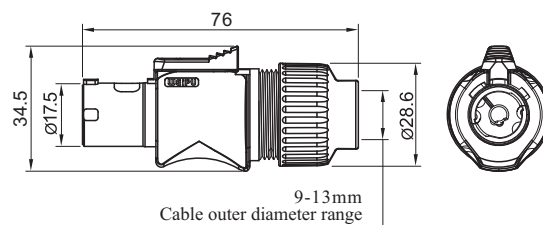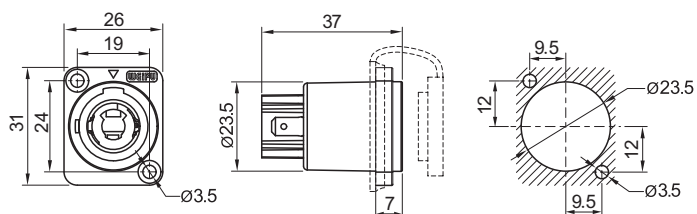

Material and spec

Coupling	Bayonet
Shell	Plug: Nylon66 Socket: PC
Contact material	Brass with silver plating
Rated current (A)	20
Rated voltage (AC, V)	250
Test voltage (AC, V) 1 min	2500
Insulation resistance (MΩ)	2000
Mating cycle	1000
Temperature range	-40℃ ~ +85℃
IP range	IP65 (mated)
Termination	Plug: screw, Receptacle: 3/16" flat tab terminals

IP65

WAC3 Series

